
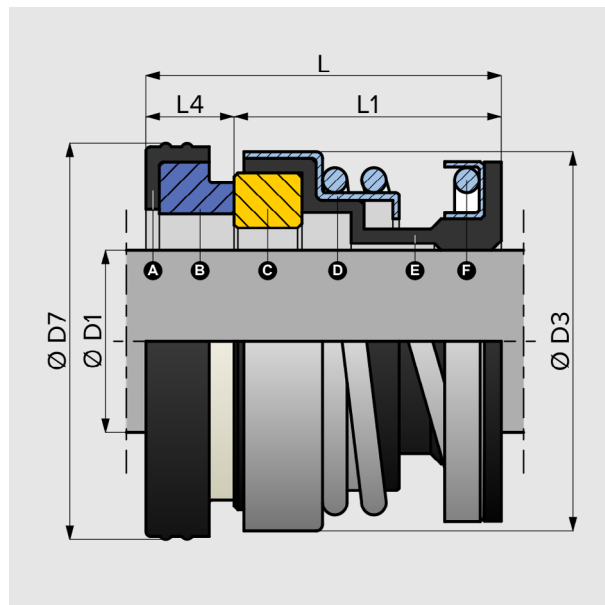


H104

'TYPE 104' SPECIFICATION SHEET

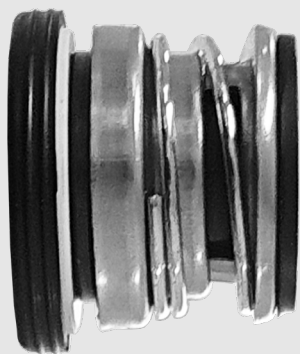

- ▶ **Compact Rubber Bellows**
- ▶ **Single Spring**
- ▶ **Suits Chinese pumps**

H104 is a compact elastomer bellows mechanical seals. It is designed to replace the mechanical seals found commonly in Chinese-made pumps.

▶ **Operating conditions**

Temperature: -30°C to +200°C
 Pressure: up to 8 bar / 116 psi
 Speed: up to 5m/s, 984 fpm

▶ **Material Options**

Rotary Face: CAB, SiC
 Stationary Face: CER, SiC
 Elastomer: N or V
 Metal Parts: Stainless Steel

PARTS

- A** Seat Cup
- B** Stationary Face
- C** Rotary Face
- D** Retainer
- E** Rubber Bellows
- F** Spring

EQUIVALENT

104

DIMENSIONS

D1	D3	D7	L4	L1	L
9mm	20.0	22.0	5.5	14.5	20.0
10mm	20.0	22.0	5.5	14.5	20.0
12mm	22.0	24.0	5.5	14.5	20.0
14mm	24.0	26.0	5.8	18.0	23.8
15mm	26.0	28.0	7.0	18.0	25.0
16mm	26.0	28.0	7.0	18.0	25.0
17mm	31.0	34.0	5.8	18.0	25.0
18mm	31.0	34.0	7.0	20.0	27.0
19mm	33.0	36.0	7.0	18.0	25.0
20mm	33.0	36.0	7.0	18.0	25.0
22mm	36.0	38.0	7.0	18.0	25.0
25mm	39.0	41.0	9.0	28.0	37.0
30mm	43.5	46.0	9.0	28.0	37.0
35mm	50.5	51.0	9.0	28.0	37.0
40mm	56.0	60.0	10.5	29.5	40.0
45mm	63.5	65.0	10.5	29.5	40.0