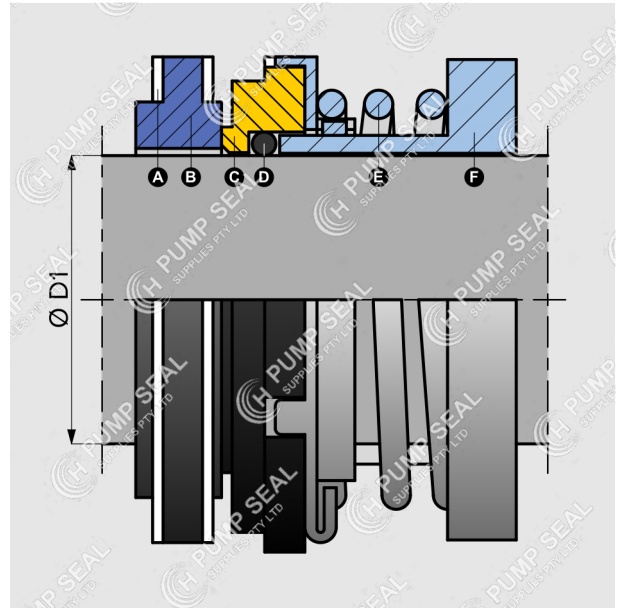


H293

'WAUKESHA C-SERIES'
SPECIFICATION SHEET

► **Waukesha C-Series**
► **Type D - External Balanced**

Externally mounted, rotary only, designed to be run directly against the S.S. pump housing or backing plate.

Suitable for multi-purpose use

► **Type DG - Clamped-In Seat**

Complete seal with hard-faced seat (SiC, CER or TC)

Suitable for maximum corrosion resistance in pure water applications.

► **Type E - Double Seal**

Uses parts from the Type D to contain a pressurised coolant or sealant.

Suitable for slurries, tacky products and heavy-duty applications

► **Type F - Flushed Seal**

Uses parts from the Type D to contain a low-pressure water cascading attachment.

Suitable for tacky, hot products and vacuum applications

PARTS

- A** PTFE Gasket
B Clamp Seat (Type DG)
C Rotary Face
D O-ring
E Spring
F Drive Collar

EQUIVALENT

Type 293

PUMP COMPATIBILITY

Replaces the seals found in Waukesha C-series centrifugal pumps:

C100
C114
C216
C218
C328