


H560DS

'TYPE 560DS - STEPPED SHAFT' SPECIFICATION SHEET

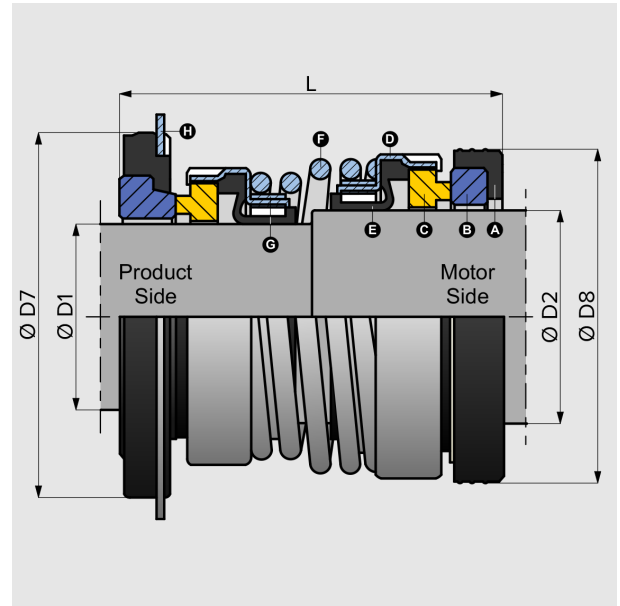

- ▶ **Double seal for stepped shafts**
- ▶ **Pump-specific**
- ▶ **To Japanese specifications**

H560DS is the back-to-back arrangement of H560 base to suit stepped shafts. Dimensions are pump-specific, found commonly in Japanese-brand submersible pumps. H560DS uses a unique non-driving conical spring.

▶ **Operating conditions**

Temperature: -30°C to +200°C
 Pressure: up to 10 bar, 145 psi
 Speed: up to 13m/s, 2500 fpm

▶ **Material Options**

External: CAB/CER, SiC/SiC
 Internal: SiC/SiC
 Elastomer: N or V
 Metal Parts: Stainless Steel

CODE

•	standard ED560
TS	Tsurumi
SK	Sakuragawa
EB	Ebara
PD	Saer PD
◇	misc.

PARTS

A	Seat Cup
B	Seat
C	Rotary Face
D	Retainer
E	Rubber Diaphragm
F	Drive Band
G	Spring
H	Locking Washer

DIMENSIONS

D1/D2	D7	D8	L	CODE
25/30mm	50.0	50.0	60.0	TS
	50.0	44.0		SK
30/35mm	57.0	58.0	60.0	TS
	57.0	57.0		SK
35/40mm	64.0	64.0	65.0	SK
45/50mm	70.0	72.0	75.0	TS