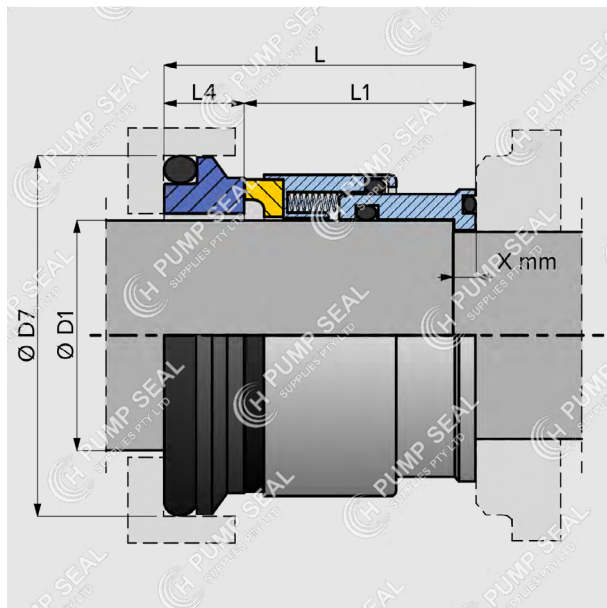


H92

'HILGE - ENCAPSULATED SPRING SEALS'
SPECIFICATION SHEET

- ▶ Suits GEA Hilge pumps
- ▶ Complete seal
- ▶ Encapsulated springs
- ▶ Bidirectional

H92 is designed to replace the single "encapsulated spring" optional seals found in Hilge hygienic pumps.

The seals feature protected, encapsulated wave or multi-springs and is optimally placed inside the pump

▶ **Material options**

Rotary Face: SiC
 Stationary: CAB or SiC
 Elastomer: N, V or EP
 Metal Parts: S.S

EQUIVALENT

M010S1
 M010S2
 M010S3
 1662
 1662L
 1663
 1663A

DIMENSIONS

D1	Ver.	D7	L4	L1	L	X
19mm	A	30.9	8.0	29.0	37.0	4.0
	B	34.0	10.0	26.0	36.0	0.5
28mm	A	48.0	10.6	34.5	45.1	0.5
	B	48.0	10.6	38.0	48.6	4.0
	C	43.3	9.0	33.0	42.0	4.0
	D	43.3	9.0	34.5	43.5	4.0
38mm	A	57.1	10.5	35.0	45.5	0.5
	B	60.5	11.5	43.0	54.5	4.0