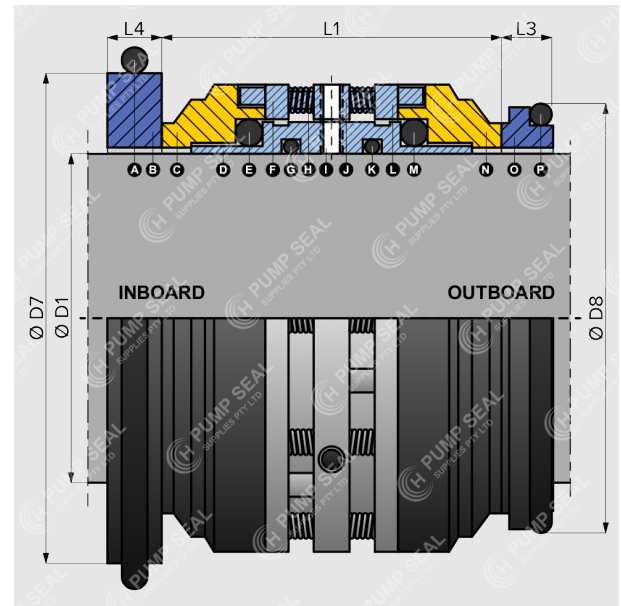


HFC**'GODWIN - TYPE 4 - SEMI-CARTRIDGE'**
SPECIFICATION SHEET

- ▶ **Double Seal, Back-To-Back**
- ▶ **Semi-Cartridge Design**
- ▶ **Multi-Spring, O-ring Pusher**
- ▶ **OEM: Type 4**
- ▶ **Suits Godwin Dri-Prime Pumps**

HFC replaces the "Type 4 heavy duty double mechanical seals in Godwin Dri-Prime pump range.

Individually designed to suit application, enquire for further information.

PARTS

- A** Inb. Stationary O-ring
- B** Inb. Stationary Face
- C** Inb. Rotary Face
- D** Drive Sleeve
- E** Inb. Rotary O-ring
- F** Inb. Rotary Thrust Ring
- G** Drive Sleeve O-ring
- H** Multi-spring
- I** Set Screws
- J** Drive Collar
- K** Drive Sleeve O-ring
- L** Outb. Rotary Thrust Ring
- M** Outb. Rotary O-ring
- N** Outb. Rotary Face
- O** Outb. Stationary Face
- P** Outb. Stationary O-ring

PUMP COMPATIBILITY

Replaces the mechanical seal the following Godwin® pumps:

CD Range (Medium Head)
CD300M (newer), CD500M

HL Range (High Head)
HL130M (newer), HL225M (newer), HL260M

OEM names, brands, model or part numbers are used solely for reference. Our components are engineered to deliver performance and service life equivalent to or exceeding that of OEM parts when correctly installed and appropriately applied. Godwin® Xylem® is a registered trademark of its respective company. Pump Seal Supplies Pty Ltd are not representative of, nor affiliated with Godwin® Xylem®