


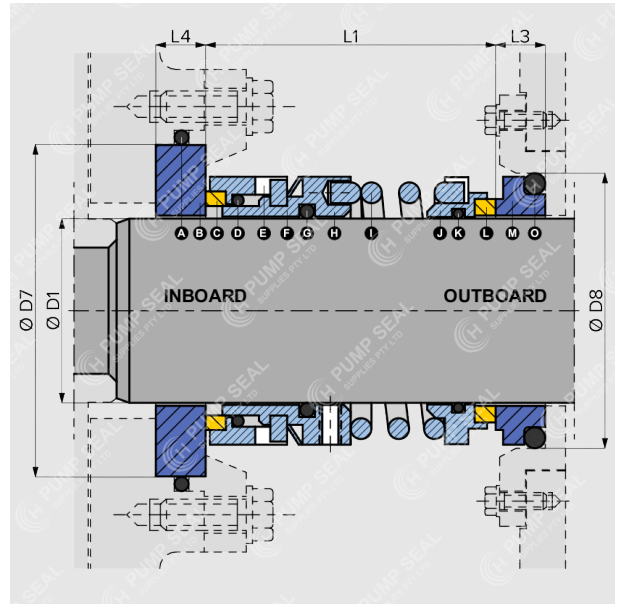

- **Double Seal, Back-To-Back**
- **Spring-driven Outboard Seal**
- **OEM: Type 2**
- **Suits Godwin Dri-Prime Pumps**

HFD is equivalent to the "Type 2" heavy duty double mechanical seals in Godwin Dri-Prime pump range.

The inboard seal features a wave-spring o-ring design and is set-screwed to the shaft. The stationary is of a monolithic clamped-in block-type design.

The outboard seal features a legged spring on both ends which provides positive torque to the outboard rotary face.

► Materials

Inboard Faces:	SiC/SiC
Outboard Faces:	SiC/CAB
Elastomers:	V
Metal Parts:	304SS

PARTS

- A** Inb. Stationary O-ring
- B** Inb. Stationary Face
- C** Inb. Rotary Face
- D** Inb. Rotary O-ring
- E** Inb. Rotary Holder
- F** Inb. Rotary Drive Collar
- G** Inb. Rotary O-ring
- H** Inb. Rotary Set Screws
- I** Outb. Spring
- J** Outb. Rotary Holder
- K** Outb. Rotary O-ring
- L** Outb. Rotary Face
- M** Outb. Stationary Face
- N** Outb. Stationary O-ring

EQUIVALENT

Type 1653D

PUMP COMPATIBILITY

Replaces the mechanical seal the following Godwin® pumps:

CD Range (Medium Head)

CD160M Mk. 1, CD180M, CD300M (open-coupled versions only)

HL Range (High Head)

HL130M (earlier versions), HL160M, HL250M