


HGPDCR

'SE, SL PUMP - DOUBLE CARTRIDGE SEAL' SPECIFICATION SHEET

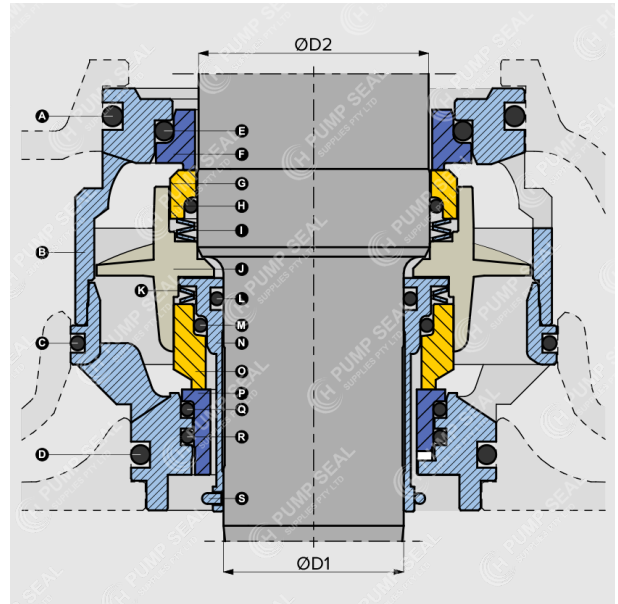

► OEM Replacement ► Suits Grundfos SE, SL Pumps

HGPDCR replaces the double mechanical cartridge shaft seal typically fitted to Grundfos SE, and SL submersible wastewater pumps with 2 or 4-pole motor sizes < 30 kW.

The plug-in cartridge design features two independent wave-spring pusher mechanical seals mounted in a single ready-to-install compact unit. The axial flow propeller provides additional cooling flow

► Material Options

Primary Faces:	SiC/SiC
Secondary Faces:	CAB/SiC
Elastomer:	V
Metal Parts:	304S.S.

INCLUDED PARTS

- A Seal Housing O-ring
- B Seal Housing
- C Seal Housing O-ring
- D Seal Housing O-ring
- E Outb. Stationary O-ring
- F Outb. Stationary Face
- G Outb. Rotary Face
- H Outb. Rotary O-ring
- I Outb. Wave Spring
- J Propeller
- K Inb. Wave Spring
- L Inb. Sleeve O-ring
- M Inb. Rotary O-ring
- N Seal Sleeve
- O Inb. Rotary Face
- P Inb. Stationary Face
- Q Inb. Stationary O-ring
- R Inb. Stationary O-ring
- S Setting Ring

PUMP COMPATIBILITY

Replaces the shaft seal in Grundfos® SE & SL submersible wastewater pumps:

SE, SL - Range 52 (9 to 30 kW)
Replaces the **mechanical seal** from OEM:
92773081, 92773089

OEM names, brands, model or part numbers are used solely for reference. Our components are engineered to deliver performance and service life equivalent to or exceeding that of OEM parts when correctly installed and appropriately applied. Grundfos® is a registered trademark of its respective company. Pump Seal Supplies Pty Ltd are not representative of, nor affiliated with Grundfos®