


HGRS

'DOUBLE GREASE SEAL' SPECIFICATION SHEET

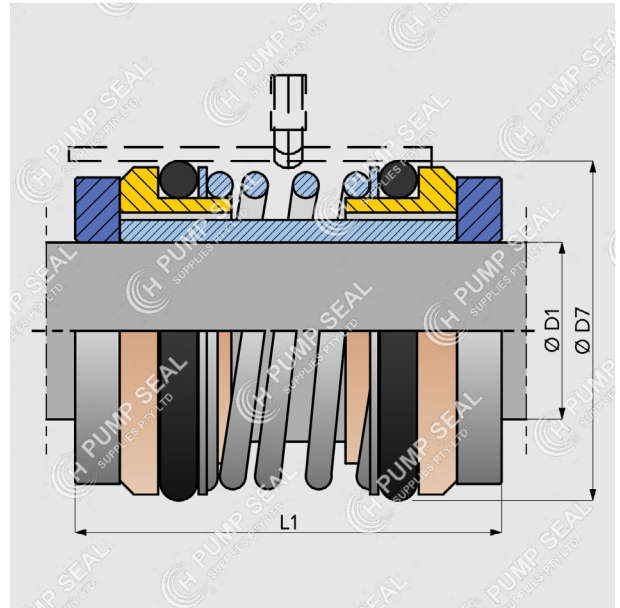

- ▶ Suits Gorman-Rupp pumps
- ▶ Replaces Double Grease Seals
- ▶ Aftermarket o-ring design
- ▶ Back-to-back arrangement
- ▶ Six standard sizes

HGRS is designed to replace the mechanical seal in Gorman-Rupp pumps fitted with the double grease "GS" seal.

Our design utilises o-rings instead of Neoprene packing rings for better compatibility with applications such as petroleum products or high temperatures. Specific elastomer compounds such as Viton® or Kalrez® are more readily available when in o-ring form.

▶ **Material Options:**

Rotating: hardened S.S.
 Tungsten Carbide (TC)
 Sintered Bronze
Stationary: Sintered Bronze
 Silicon Carbide (SiC)
 316 S.S.
Elastomer: N / V / EP
Metal Parts: S.S.

EQUIVALENT

GS625
GS750
GS1000
GS1250
GS1500
GS1750

PUMP COMPATIBILITY

Replaces Gorman-Rupp pumps fitted with Double Grease Seals