


HGSL3

'GRUNDFOS - S-RANGE, SARLIN' SPECIFICATION SHEET

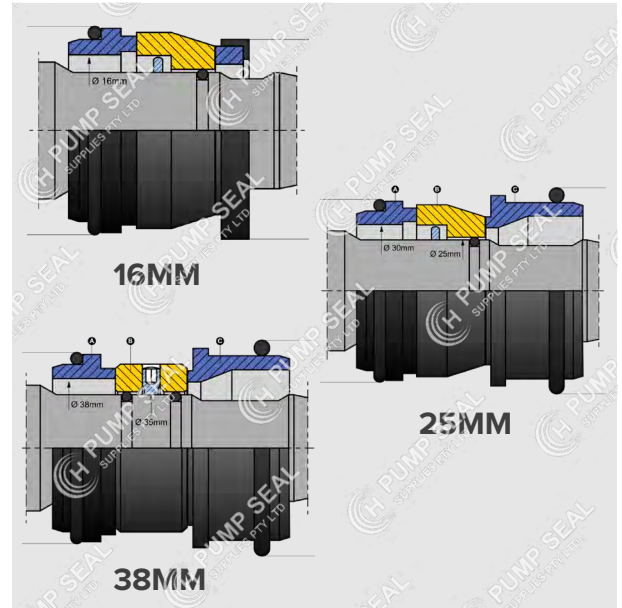

- ▶ **Double Seal - Face Kit**
- ▶ **Suits S, Sarlin Pumps <5.5kW**

Double-sided pinned middle rotary face provides torque transmission against two stationarys, forming the primary seal, in SiC/SiC and secondary seal, SiC/CAB.

INCLUDED PARTS

Rotary Face
Stationary Face x 2
O-rings

EQUIVALENT

AESSEAL: SOSU / SOSSU
Vulcan: Type 86

PUMP COMPATIBILITY

Replaces the (pos. 105) shaft seal in:

S-pumps - Range 34

S-pumps - Range 42