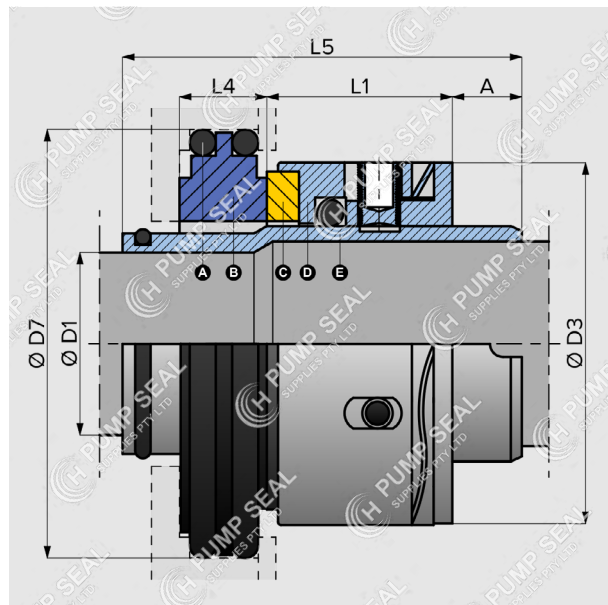


HSLR

'H/INO/SLR'
SPECIFICATION SHEET

- ▶ Suits Inoxpa SLR lobe pumps
- ▶ Single seal for SLR 0, 1, 2, 3
- ▶ Seperate shaft sleeve

HSLR is designed to replace the single mechanical seals in Inoxpa SLR lobe pumps.

The double o-ring seat provides additional friction for anti-rotation, with the outer o-ring retained by a cover plate.

The seal sets on a shaft sleeve, replacement available upon request.

▶ Material Options

Rotary Face: SiC inserted
Stationary Face: CAB solid
SiC solid

PARTS

- A** O-ring
B Stationary (reversible)
C Rotary Face
D Rotary Drive Collar
E Shaft Sleeve

EQUIVALENT

W011 / W011U
Type 1683

DIMENSIONS

D1	D3	D7	L4	L1	A
24mm	34.2	38.1	7.3	19.1	8.0
28mm	40.0	46.0	11.0	19.1	9.5
35mm	45.6	53.0	12.0	22.9	11.0
50mm	62.0	70.0	12.0	22.9	20.0
65mm	see HSLR4				
80mm	see HSLR5				