

HE

'UN8E5K22'

SPECIFICATION SHEET



- **Balanced Seal, O-ring Mounted**
- **To DIN EN 12756 Standards**
- **OEM Replacement**
- **Suits Lowara e-SV, SV & SVI**

HE is a DIN EN 12756 compliant balanced mechanical seal, which replaces the seals fitted to Lowara e-SV and SV - Vertical Multistage pumps as well as SVI - Submersible Vertical Multistage pumps.

The seal is designed with an internally housed single spring with torque provided by three drive pins on the drive ring.

► **Material options**


Rotary Face:	SiC
Stationary Face:	CAB
Elastomer:	V or EP
Metal Parts:	304SS

PARTS

- A Stationary O-ring
- B Stationary Face / Ring
- C Rotary Face / Ring
- D Rotary O-ring
- E Rotary Holder
- F Rotary O-ring
- G Rotary Spring
- H Rotary Set Screws
- I Rotary Drive Ring
- J Rotary Drive Pin

EQUIVALENT

POLXB
Type 822
UN8E5K22

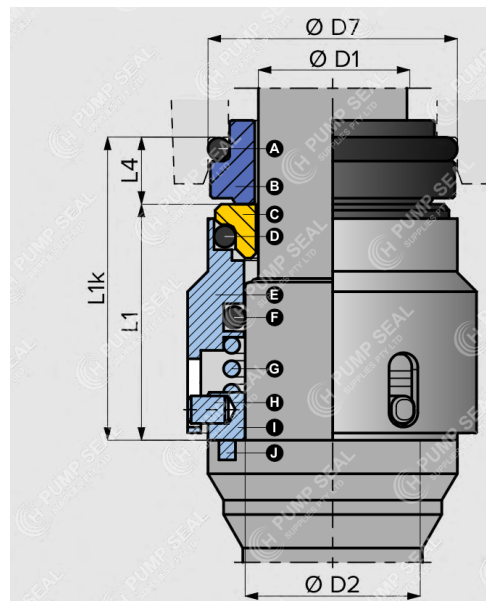

PUMP COMPATIBILITY

Replaces the balanced mech. seals in Lowara® pumps:

e-SV, SV Range

Replaces the standard mechanical seal: 002232300

Replaces the standard mechanical seal from kit: KL01AC0

SVI Range

Replaces the standard mechanical seal: 002232306

Replaces the standard mechanical seal from kit: KL01AC2