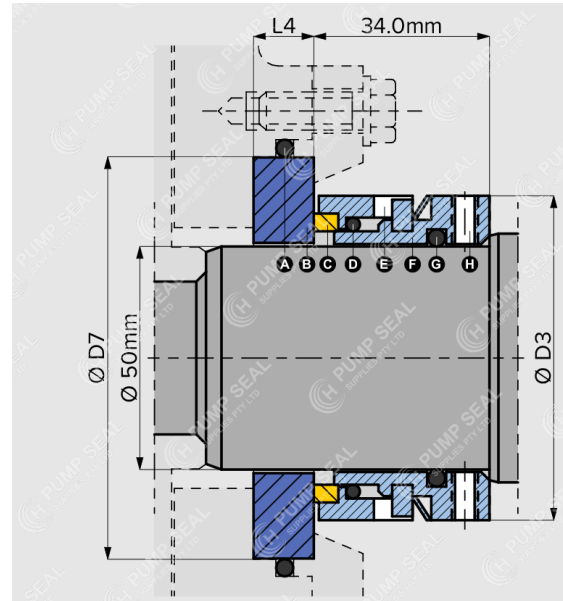


HF**'GODWIN - TYPE 1 - 50MM'****SPECIFICATION SHEET**

- **Wave-spring, O-ring Pusher**
- **OEM: Type 1 - 50mm Seal**
- **Suits Godwin Dri-Prime Pumps**

HF is equivalent to the 50mm "Type 1" heavy duty single mechanical seals in Godwin Dri-Prime pump range.

The seal features a wave-spring o-ring design and is set-screwed to the shaft. The stationary is of a monolithic clamped-in block-type design.

► **Materials**

Rotary Face:	SiC
Stationary Face:	SiC
Elastomers:	V
Metal Parts:	304SS

PARTS

- A** Stationary O-ring
- B** Stationary Face / Ring
- C** Rotary Face / Ring
- D** Rotary O-ring
- E** Rotary Holder
- F** Rotary Drive Collar
- G** Rotary O-ring
- H** Rotary Set Screws

EQUIVALENT

Type 1725P

PUMP COMPATIBILITY

Replaces the mechanical seal the following Godwin® pumps:

CD Range (Medium Head)
CD140M, CD225M, CD250M

HL Range (High Head)
HL100M, HL125MS, HL150M, HL150MHD

OEM names, brands, model or part numbers are used solely for reference. Our components are engineered to deliver performance and service life equivalent to or exceeding that of OEM parts when correctly installed and appropriately applied. Godwin® Xylem® is a registered trademark of its respective company. Pump Seal Supplies Pty Ltd are not representative of, nor affiliated with Godwin® Xylem®