


HGSDCR

'SE, SL PUMP - DOUBLE CARTRIDGE SEAL' SPECIFICATION SHEET

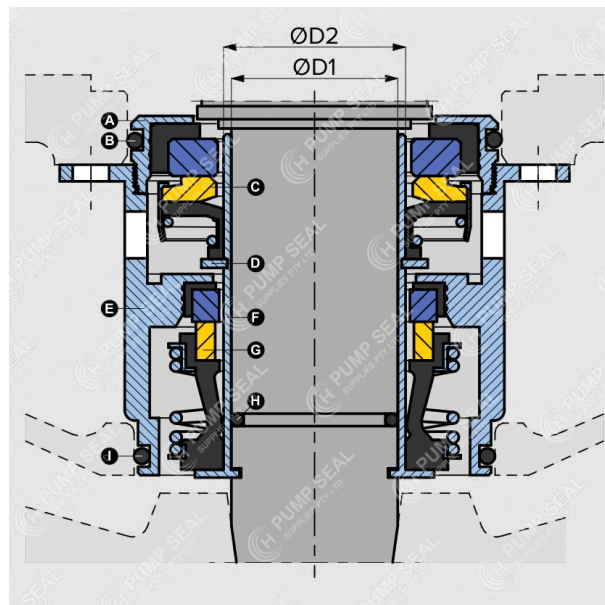

► OEM Replacement ► Suits Grundfos SE, SL Pumps

HGSDCR replaces the double mechanical cartridge shaft seal typically fitted to Grundfos SE1, SEV, SL1 and SLV submersible wastewater pumps with motor sizes < 11.0kW.

The cartridge design enables easy service, with the primary & secondary seals assembled in pre-set metal housing that minimises the risk of incorrect fitting.

► Material Options

Primary Faces:	SiC/SiC
Secondary Faces:	CAB/CER
Elastomer:	V
Metal Parts:	304S.S.

INCLUDED PARTS

- A Secondary Seal Holder
- B Seal Holder O-ring
- C Secondary Seal
- D Setting Clip
- E Seal Holder
- F Seal Sleeve
- G Primary Seal
- H Shaft O-ring **excluded**
- I Seal Holder O-ring

PUMP COMPATIBILITY

Replaces the shaft seal in Grundfos® SE & SL submersible wastewater pumps:

SE1, SEV

Replaces the **mechanical seal** from OEM:
96102360, 96635732, 96102361, 96635733

SEG

Replaces the **mechanical seal** from OEM:
96645160, 96645275

SL1, SLV

Replaces the **mechanical seal** from OEM:
96102360, 99488972, 96102361, 99489003

DP10.50.26

Replaces the **mechanical seal** from OEM:
96076123, 76645275

OEM names, brands, model or part numbers are used solely for reference. Our components are engineered to deliver performance and service life equivalent to or exceeding that of OEM parts when correctly installed and appropriately applied. Grundfos® is a registered trademark of its respective company. Pump Seal Supplies Pty Ltd are not representative of, nor affiliated with Grundfos®